

# **DELIVERY INSTRUCTIONS**

## **VALID FOR TRUCK DELIVERIES (Date 08/2024)**

For container deliveries separate agreements must be made!

Receipt of goods	Page 1
Dispatch of notifications	Page 1
Shipping address	Page 1
Cable printing	Page 2
Label printing	Page 2
Packagings   Tolerances	Page 3
Packaging   Coils   Goods on pallets	Page 3 - 5
Drums   Miscellaneous	Page 5 - 7

#### **ATTENTION**

For imports from third countries, the handling of customs formalities must be carried out by a service provider appointed by the company böhm Kabel.

#### RECEIPT OF GOODS

Monday – Thursday 08.00 am – 15.00 pm Friday 08.00 am – 12.00 noon

## **DISPATCH OF NOTIFICATIONS Notifications from 4,000 kg**

### Deliver only on truck per day and per supplier!

In order to avoid long waiting periods for trucks, all delivery dates with more than 4,000 kg must be coordinated with our stock **IN TIME** before shipment of the goods by either phone (+49 2371 8286-40e) or via E-Mail at <u>wareneingang@boehm-kabel.de</u>. It is absolutely necessary, that the unloading date has been confirmed by us. Please send a packing list – not later than on the day of shipment – stating which delivery position is on which pallet. Every package must be marked with the same number noted on the packing list or delivery note, if possible in plain text and as a QR-code or barcode (Code 39).

### SHIPPING ADDRESS

böhm Kabeltechnik GmbH Logistics center Kalthofer Feld 3 58640 Iserlohn-Kalthof GERMANY

Copyright: Copying for private and commercial purposes, in whole or in part, only with the permission of böhm Kabeltechnik GmbH.

# Kabel

# **CABLES CONNECT**

#### **CABLE PRINTING**

All non-VDE standardized or harmonized cables are to be printed as follows:

**Font** preferably Arial or similar

**Font size** at least 0.5 cm (depending on the cable outer diameter)

**Printing** böhm Kabel

**Text** Cable type = Capital letters

böhm Kabel type: No. of cores x cross-section qmm CE and from 0,6/1 kV

incl. kV-numbers

**Example:** 

böhm Kabel YSLY-JZ 3 x 1,5 qmm  $\rm CE$  "Meter Marking" Lot number" or böhm Kabel YSLY-JZ 3 x 1,5 qmm 0,6/1 kV  $\rm CE$  "Meter Marking" Lot number

NO date may be printed!

Exception: all H03VV-F + H05VV-F must be EMBOSSED PRINTING (STAMPING), NO normal printing!

#### **LABEL PRINTING**

In accordance with the Low Voltage Directives 2014/35/EU which came into force 20th April 2016 the complete böhm Kabeltechnik address and the **correct CE-sign** must be printed on each label (see label example). Specify CPR-data on the label!

The following data must be included in the label:

- CE-sign
- Code notifying body (under the CE-sign)
- böhm-/producer address (for böhm printed goods use the böhm address, otherwise the manufacturer's address!)
- last 2 signs of the years getting CPR first time
- DOP-number (for böhm printed goods use the böhm DoP-No., otherwise the manufacturer's DoP-No.!)
- Performance class (reaction to fire/dangerous substances)
- Number of European standard (e.g. EN 50575)
- Product identification (article name, if possible batch number)
- Intended use as specified in EN
- Warning notice (electrical risks)

YSLY-JZ 3 x 1,5

NB 1014 17

böhm Kabeltechnik GmbH, Hall-Str. 8 58636 Iserlohn, GERMANY

DoP: BK000020101

EN 50575: 2014

Cables for general applications in construction works subject to reaction to fire requirements.

Reaction to fire: Eca
Dangerous substances: NPD

Danger of electric shock.

Installation only by a qualified electrician.

# Kabel

# **CABLES CONNECT**

## **PACKAGINGS | TOLERANCES**

Ordered packagings must be fulfilled in all cases. Differing lengths must always be clarified with us before shipment. The following production tolerances must be fulfilled.

#### **TOLERANCES**

- **COILS** We do not accept any tolerances for coils, that means coils must always be delivered as FIX lengths.
- DRUMS (500 m lengths): These drums need to be delivered as FIX lengths. We will accept only one irregular length (-0 % / max. +10 %) per delivered production lot. This irregular length is to be packed separately.
- DRUMS (> 500 m lengths): We will accept only one irregular length (-0% / max. +10 %) per delivered production lot. This irregular length is to be packed separately.

# PACKAGING | COILS | GOODS ON PALETTS


#### **COILS**


• Each coil must be sealed in neutral plastic foil. Do not fix coils with cable ties.


#### **GOODS ON PALLETS**


- Only on Euro pallets (or adequate non-returnable pallets of the same dimensions) sealed in neutral plastic foil
- Only one item of the same packaging per pallet (with the same number of cores, cross-section and length)
- If quantities are insufficient to fill a complete pallet, the affected items must be packed on mixed pallets (different types separated by paper layers)
- Packing height (including pallet) not higher than 1.10 m
- Maximum weight per pallet = 1,000 kg
- Separation of coils and drums is absolutely necessary
- Packed pallets must not exceed the length and width of Euro pallets (1.2 m x 0.8 m).
   DO NOT pack over pallet edges!

























Copyright: Copying for private and commercial purposes, in whole or in part, only with the permission of böhm Kabeltechnik GmbH.



S Mabel	55m	55/m	55m
	Kabel	Kabel	Kabel
LS)m	55/m	b5/m	bosam
Kabel	Kabel	Kabel	Kabel
55/m	b3/m	₩	55/m
Kabel	/Kabel	Kabel	Kabel
LS/m	b 3/m	₩	55m
Kabel	Kabel	Kabel	Kabel
Kabel	b3/m	boym	55/m
	Kabel	Kabel	/Kabel
Mabel (	b 3/m	55m	55/m
	Kabel	Kabel	Kabel
(EPAL)			EPAL








### **DRUMS**

- Max. gross weight per drum = 4 tons
- Drum diameter max. 2,20 m
- Drums up to max. 60 cm may only be delivered on palletts in a horizontal position
- Drums from 70 cm to 80 cm: 2 drums each must be delivered on a pallet in a vertical position
- Drums ≥ 90 cm: One drum each must be delivered on a pallet in a vertical position
- Drums ≥ 140 cm: The drums may only be loaded in a vertical position in driving direction
- Flat cable drums must always be loaded in a vertical position (see illustration)
- Deliver weather-sensitive goods on drums with flange diameter < 1,25 m!
- Do not exceed the carrying capacity of the drums regarding weight and capacity
- No spools or drums with MDF-flanges or pressboard flange
- Always deliver drums in UV-resistant protection foil
- Dimensions (standard sizes) (see table)
- Cable ends must be protected with end caps



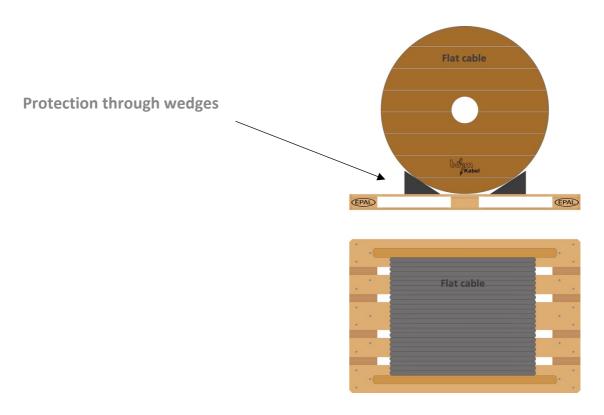





## **DRUM DIMENSIONS**

Spool size	Flange-Ø	Core-Ø	Drum width	Winding width
	mm	mm	mm	mm
40	400	150	420	400
50	500	150	420	400
60	600	200	420	400
70	710	355	520	400
80	800	400	520	400
90	900	450	690	560
100	1.000	500	710	560
120	1.250	630	890	670
140	1.400	710	890	670
160	1.600	800	1.100	840
180	1.800	1.000	1.100	840
200	2.000	1.250	1.350	1.045
220	2.240	1.400	1.450	1.140

# **MISCELLANEOUS**

Our order number and the position of each individual item must be indicated on invoices, delivery notes and packing lists.

# **OTHERWISE NO RECEIPT OF GOODS IS POSSIBLE**

In case of defective or damaged shipments the receipt of goods is refused without exception!

böhm Kabeltechnik GmbH